

SmartGen

MAKING CONTROL SMARTER

BPL52-314

LIQUID-COOLED BATTERY BOX

USER MANUAL



郑州众智科技股份有限公司
SMARTGEN(ZHENGZHOU)TECHNOLOGY CO.,LTD.

SmartGen Registered trademark

No.28 Xuemei Street, Zhengzhou, Henan, China

Tel: +86-371-67988888/67981888/67992951

+86-371-67981000(overseas)

Fax: +86-371-67992952

Web: www.smartgen.com.cn/

www.smartgen.cn/

Email: sales@smartgen.cn

All rights reserved. No part of this publication may be reproduced in any material form (including photocopying or storing in any medium by electronic means or other) without the written permission of the copyright holder.

SmartGen reserves the right to change the contents of this document without prior notice.

Table 1 Software Version

Date	Version	Note
2025-06-23	1.0	Original release.

CONTENT

1	OVERVIEW	4
2	NAMING CONVENTION	4
3	PERFORMANCE AND CHARACTERISTICS	5
4	APPEARANCE	6
5	OVERALL DIMENSIONS	6
6	TECHNICAL PARAMETER	7
7	TERMINAL DEFINITION	8
8	INSTALLATION AND USE	9
9	NOTES	9
10	MAINTENANCE	9
11	OPTIONAL COMPONENT	9

SmartGen

1 OVERVIEW

BPL52-314 Liquid-cooled Battery Box is lithium iron phosphate battery with energy storage medium that is highly safe and has a long cycle life, which is modular, easy to install and maintain. With high-efficiency liquid-cooling heat dissipation technology, it can effectively control the temperature of the battery module, significantly enhancing the safety, reliability and cycle life of the battery system. The built-in fire control module guarantees the system safe operation.

2 NAMING CONVENTION

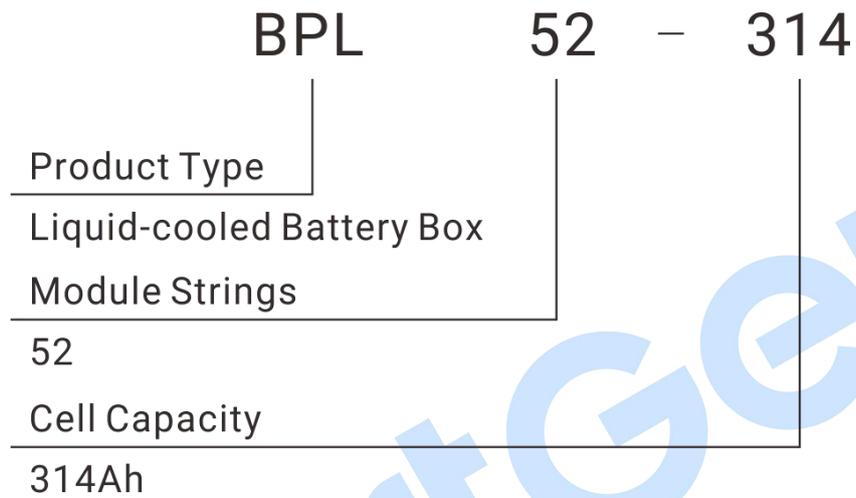


Fig.1 Naming Convention

3 PERFORMANCE AND CHARACTERISTICS

- **High-efficiency heat dissipation:** The integrated liquid-cooling cycle system using coolant to quickly remove the heat generated by the battery, ensuring that the battery operates within the optimal temperature range and extending its service life;
- **Intelligent monitoring:** Built-in temperature sensor and monitoring system enable it to monitor internal battery box temperature in real time and intelligently adjust cooling efficiency, prevent overheating;
- **Compact structure:** Optimized battery box structure maximizes the usage space and ensures good heat dissipation effect and mechanical strength;
- **Safety and protection:** Equipped with electrical protection mechanism and built-in fire control module, it can run safely under various working conditions;
- **Easy maintenance:** Modular design makes it convenient for daily inspection and maintenance and reduce the operation cost;
- **High protection class:** Protection class can reach IP67.

SmartGen

4 APPEARANCE



Fig.2 Appearance Diagram

5 OVERALL DIMENSIONS

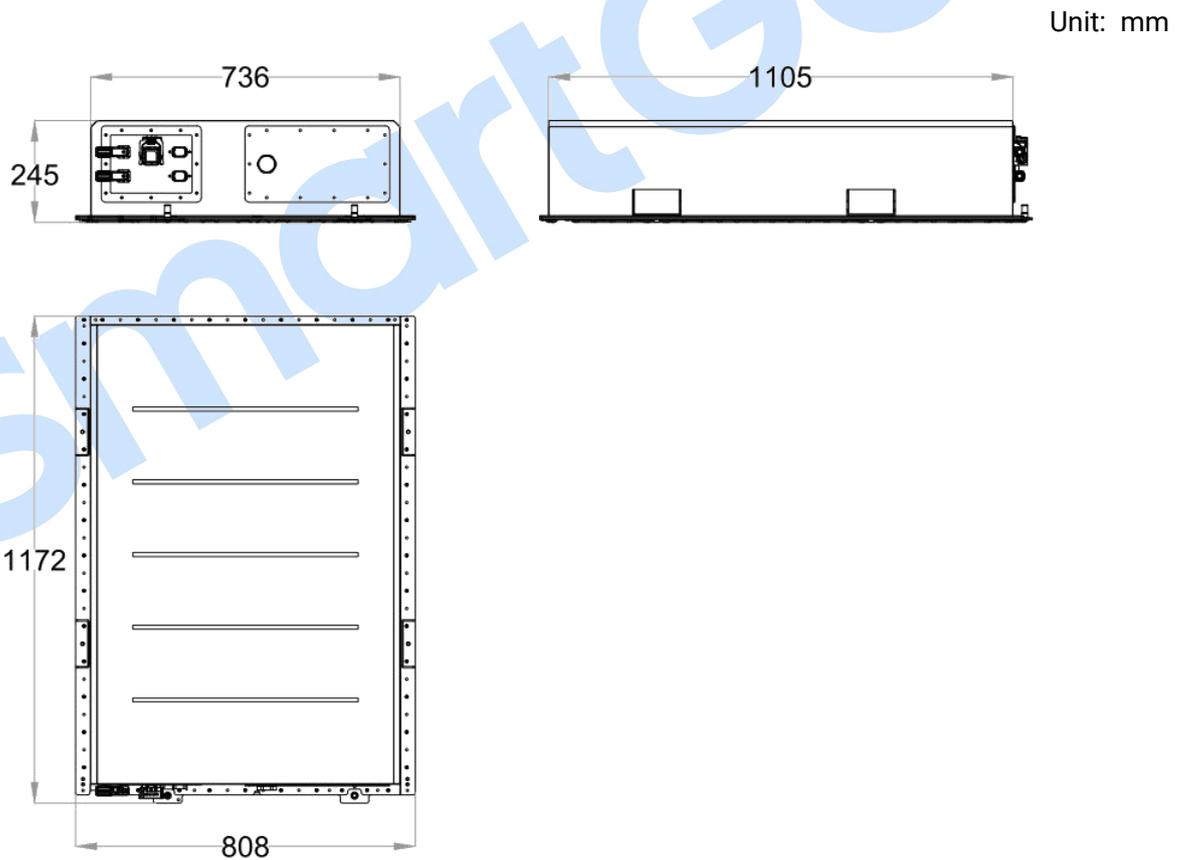


Fig.3 Overall Dimensions

Table 2 Technical Parameters

Item	Parameter
Model	BPL52-314
Cell Type	LFP
Cell Specification	3.2V/314Ah
Group Method	1P52S
Rated Energy	52.2kWh
Rated Voltage	DC166.4V
Working Voltage Range	DC145.6V~187.2V
Maximum Continuous Charge Rate	0.5C
Maximum Continuous Discharge Rate	0.5C
Cooling Method	Liquid-cooling
Built-in PACK-level Fire Control	Perfluorohexanone (aerosol for special order)
Protection Level	IP67
Dimensions	808mmx1172mmx245mm
Weight	410kg

7 TERMINAL DEFINITION

Table 3 Terminal Definition of Communication-1



Figure	No.	Definition	Function
	1	VIN+	DC24V power supply.
	2	VIN -	
	3	CANH	BMU communication port CANH.
	4	NC	/
	5	NC	/
	6	NC	/
	7	CANL	BMU communication port CANL.
	8	ID IN	ID auto-coding.

Table 4 Terminal Definition of Communication-2

Figure	No.	Definition	Function
	1	VIN+	DC24V power supply
	2	VIN -	
	3	CANH	BMU communication port CANH.
	4	TR2	TR1 and TR2 are short-connected to 120Ω terminal match resistor. The TR1, TR2 at the end of the battery cluster is connected.
	5	TR1	
	6	NC	/
	7	CANL	BMU communication port CANL.
	8	ID OUT	ID auto-coding.

8 INSTALLATION AND USE

- Please ensure that the battery box and its surroundings are dry and clean, and no other damage before installation.
- Connect the coolant inlet and outlet and ensure the sealing is good.
- Connect the wiring of the battery box, ensure that it has good contact.
- Starting the cooling system, observe the operation situation and ensure that there is no abnormal situation.
- Regularly check the coolant status, level and system pressure. Please handle the abnormal situation in time.

9 NOTES

- Please install and use it under the guidance of professionals.
- Do not start the cooling system without coolant.
- Do not use the battery box under too hot or too cold environment.
- Please stop using immediately and contact the after-sales when battery or cooling system is abnormal.

10 MAINTENANCE

- Regularly check the coolant status, and replace it in time if there is pollution or deterioration.
- Regularly check the connection of battery box and cooling system, ensure that there is no leakage.
- Regularly check the battery contact point, ensure that it has good contact.
- Keep the battery box clean to avoid dust and debris affecting the heat dissipation effect.

11 OPTIONAL COMPONENT

Table 5 Optional Component

Item	Specification	Qty.	Remark
Orange ESS High-voltage Connector Head	ESP-250A-70-OR-00	1	70mm ² wire diameter is recommended.
Black ESS High-voltage Connector Head	ESP-250A-70-BK-00	1	70mm ² wire diameter is recommended.
8P Plug	AT06-08SA	2	
Matching Pin	AT62-16-0822	12	0.3-0.5mm ² wire diameter is recommended.
Matching Clamping Plate	AW8S	2	
Connector Plug	A114017	6	
Water Inlet/Outlet Joint	CQC14	2	Select the inner diameter of liquid-cooling pipe according to the joint specification.